


Pascal Pembalik Mold model SMR

Tipe penggerak roda gigi

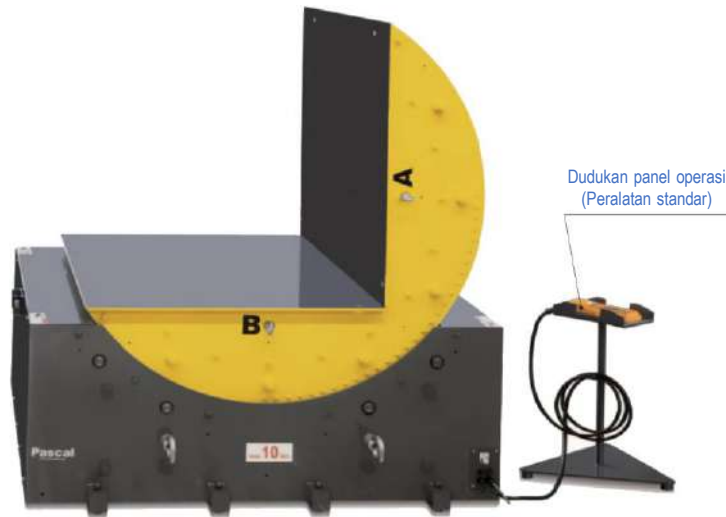

Model		SMR01-C	SMR03-C	SMR05-C	SMR10-C	SMR15-C	SMR20	SMR30	SMR50
Maks. Berat rotasi	ton	1	3	5	10	15	20	30	50
90° Waktu rotasi (pada 60 Hz)	detik	1.5	25	25	25	45	45	45	60
Motor penggerak (AC200V, 3-phase)	kW	0.1	0.4	0.75	1.5	1.5	2.2	5.5	5.5
Kapasitas daya	kVA	3	3	3	5	5	5	10	12
Berat	ton	0.4	1.3	1.4	2.2	3.7	(6.5)	(11.7)	(20.2)
A	mm	600	1000	1000	1260	1600	1800	2000	2200
B	mm	600	1000	1000	1150	1400	1800	2200	2600
C	mm	410	685	685	864	1045	(990)	(1160)	(1200)
D	mm	1010	1685	1685	2124	2645	(2790)	(3160)	(3400)
E	mm	1179	1599	1599	2089	2589	(2910)	(3270)	(3600)
F	mm	819	1304	1304	1459	1762	(1970)	(2300)	(2440)

Pascal Pembalik Mold model SMR-V (dengan dudukan-V)

Pembalik untuk material gulungan

Tipe penggerak roda gigi



## Pascal Pembalik model SMR-V (dengan dudukan-V)

### Pembalik untuk gulungan kawat

Tipe penggerak roda gigi



Model		SMR03-V	SMR05-V	SMR10-V	SMR15-V
Maks. Berat rotasi	ton	3	5	10	15
90° Waktu rotasi (pada 60 Hz)	detik	25	25	25	45
Motor penggerak (AC200V, 3-ph)	kW	0.4	0.75	1.5	1.5
Kapasitas daya	kVA	3	3	5	5
Berat	ton	1.4	1.5	2.3	3.8
A	mm	1000	1000	1260	1600
B	mm	1000	1000	1150	1400
C	mm	685	685	864	1045
D	mm	1685	1685	2124	2645
E	mm	1599	1599	2089	2589
F	mm	1304	1304	1459	1762
Maks. øa	mm	1000	1000	1100	1300
Min. øa	mm	600	600	800	1000